

# IR VARI-FOCAL DOME CAMERA



DI-390IPVF  
DI-380IPVF



1/3" CMOS Sensor  
2 / 1.3 Mega-Pixel  
True Day & Night (IR Cut Removable)  
0 Lux (IR On) Min. Illumination  
ONVIF

Digital WDR  
3D Noise Reduction  
Motion Detection and Privacy Masking  
2.8-12mm Vari-Focal Lens  
25m IR Illumination


PoE Support  
1 Way Audio  
IP 66 Protection

## Specifications

		DI-390IPVF	DI-380IPVF	
Camera	Video	Model	DI-390IPVF	
		Image Sensor	Sony IMX122 1/3" CMOS	
		Effective Pixels	1920x1080	
		Electronic Shutter	1/25s ~ 1/100000s	
		Day & Night	ICR	
	Audio	Audio compression	G711A/U	
		Communication	Two Way Audio	
	Image Enhancement	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto / Manual) ROI (Region of interest) Setting Sharpness, Saturation, Brightness & Contrast Adjustable	
		WDR Range	Digital WDR	
		Noise Reduction	3D-DNR	
Image Orientation		Mirror/Flip/Vertical Mode		
Privacy Zone		Yes		
Motion Detection		Yes		
Compression	Video Compression	H.264		
	Resolution	1080P (1920x1080)*, 960P (1280x960)**, 720P (1280x720), VGA, QVGA		
	Multi-stream	1920x1080 (1~30fps)* / 1280x960 (1~30fps)** / 1280x720 (1~30fps) / 1280x720 (1~30fps) / 640x480 (1~30fps) / 320x240 (1~30fps)		
	Bit rate	64Kbps ~ 8Mbps	64Kbps ~ 4Mbps	
	Encode Mode	VBR/CBR		
	Image Quality	Five levels under VBR; Free adjustment under CBR		

Housing	IR Distance	25m (42 IR LED)
	Lens	2.8-12mm
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Water-proof	IP66
	Bracket	3-Axis Ball
	Dimensions	Φ119mm×82mm
Connectivity	Weight(gross)	669g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	CVBS (BNCx1)
	Mic Connectivity	1Ch Input
	SD Card	No
	RS485	No
Network	Alarm	No
	Remote Monitoring	IE Browsing, CMS 2.0 Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
Others	Ethernet	100Mbps
	PoE	Yes
	Power Supply	DC12V/PoE, 180mA (Max)
Work Environment	-10 C ~ 50 C , 10%~90% Humidity	

\*DI-390IPVF Model Only \*\*DI-380IPVF Model Only

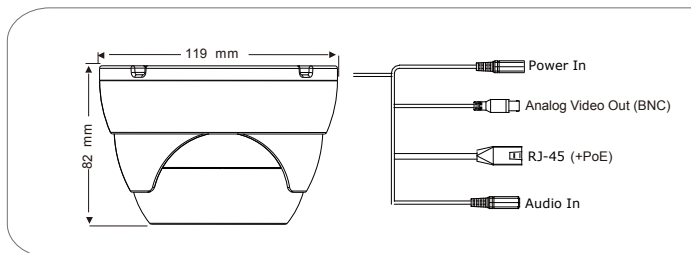

Junction Box is available

